

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED627

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 900 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	24,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	79
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,389 0,389	
Parameters for directional light sources:				
Peak luminous intensity (cd)	641	Beam angle in degrees, or the range of beam angles that can be set	115	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

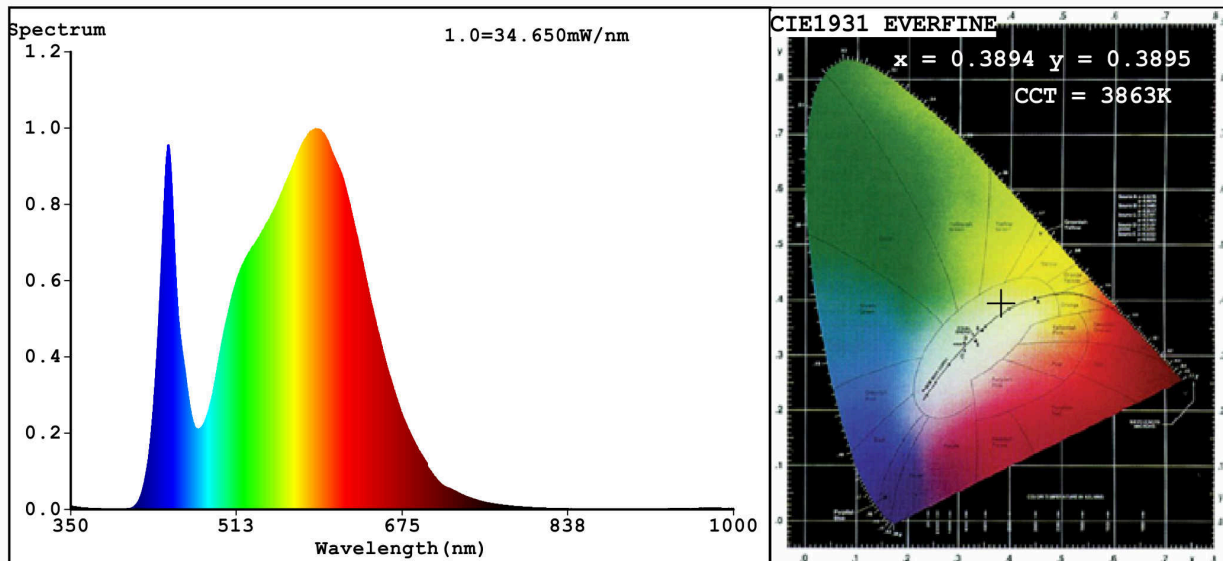

Color Parameters:

Chromaticity Coordinate: $x=0.3894$ $y=0.3895$ $u'=0.2259$ $v'=0.5084$
CCT=3863K (Duv=0.0033) Dominant WL:Ld =578.0nm WL:Lc = --nm Purity=33.7%
Ratio:R=18.0% G=78.9% B=3.0%; Peak WL:Lp=590.1nm FWHM=146.0nm
Render Index:Ra=79.8

R1 =77	R2 =85	R3 =93	R4 =80	R5 =78	R6 =81	R7 =85
R8 =60	R9 =0	R10=66	R11=79	R12=62	R13=78	R14=96
						R15=70

Photo Parameters:

Flux = 1965 lm Eff. : 79.59 lm/W Fe = 5.809 W

Electrical parameters:

V = 220.00 V I = 0.2205 A P = 24.69 W PF = 0.5088

WHITE:ANSI_4000K

Status: Integral T = 19 ms Ip = 32544 (50%)

Model:LED PANEL ROUND OM
Tester:Atanas DAKOV
Temperature:25.3Deg
Manufacturer:ELMARK

Number:99XLED627
Date:2021-03-16 10:12:06
Humidity:65.0%
Remarks:7455