

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED633

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	12,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	167	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	167	
	Depth	18	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,445 0,409
Parameters for directional light sources:			
Peak luminous intensity (cd)	601	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,70
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

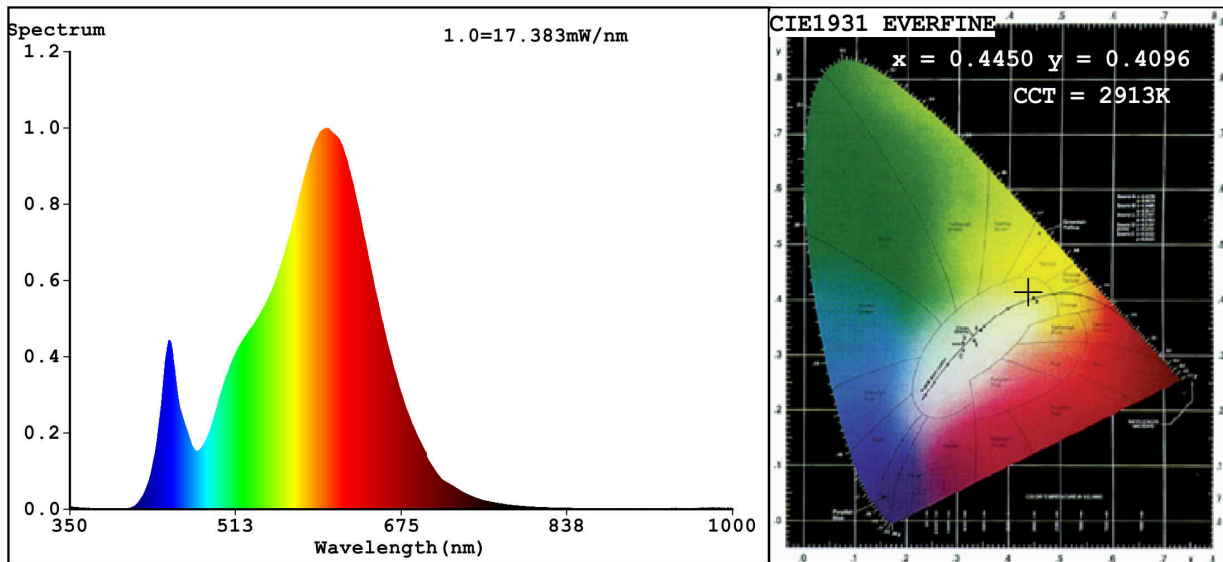

Color Parameters:

Chromaticity Coordinate: $x=0.4450$ $y=0.4096$ / $u'=0.2534$ $v'=0.5248$
 CCT=2913K (Duv=0.0011) Dominant WL:Ld =582.8nm WL:Lc = --nm Purity=56.5%
 Ratio:R=23.2% G=74.5% B=2.3%; Peak WL:Lp=601.1nm FWHM=121.7nm
 Render Index:Ra=81.6

R1 =79 R2 =90 R3 =97 R4 =80 R5 =80 R6 =88 R7 =82
 R8 =56 R9 =1 R10=77 R11=80 R12=73 R13=82 R14=99 R15=71

Photo Parameters:

Flux = 835.9 lm Eff. : 65.63 lm/W Fe = 2.515 W

Electrical parameters:

V = 220.02 V I = 0.1129 A P = 12.74 W PF = 0.5127
 WHITE:ANSI_3000K

Status: Integral T = 59 ms Ip = 49441 (75%)

Model:LED PANEL ROUND
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99XLED633
 Date:2021-01-14 10:35:46
 Humidity:65.0%
 Remarks:7293