

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED636CWE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	25,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	72
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,323 0,352	
Parameters for directional light sources:				
Peak luminous intensity (cd)	448	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

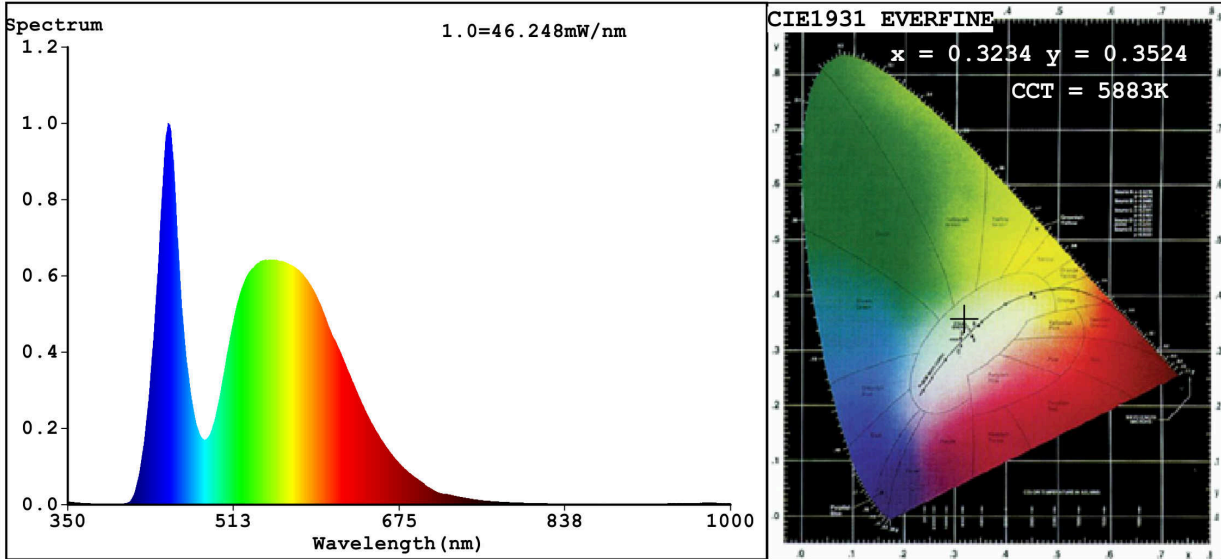

Color Parameters:

Chromaticity Coordinate: $x=0.3234$ $y=0.3524/u'=0.1965$ $v'=0.4819$

CCT=5883K(Duv=0.0098) Dominant WL:Ld =519.8nm Purity=3.8%

Ratio:R=12.3% G=83.9% B=3.8%; Peak WL:Lp=448.6nm FWHM=26.5nm

Render Index:Ra=72.7

R1 =68	R2 =76	R3 =83	R4 =73	R5 =70	R6 =69	R7 =83	
R8 =58	R9 =0	R10=45	R11=70	R12=45	R13=70	R14=90	R15=62

Photo Parameters:

Flux = 1806 lm Eff. : 71.87 lm/W Fe = 5.438 W

Electrical parameters:

V = 230.04 V I = 0.2159 A P = 25.13 W PF = 0.5061

WHITE:OUT

Status: Integral T = 21 ms Ip = 53525 (82%)

Model:LED PANEL SQUARE/24W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:99XLED636CW
Date:2018-08-14 13:04
Humidity:65.0%
Remarks:017V077À_4536