

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED821

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	900 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	75	
		Chromaticity coordinates (x and y)	0,318 0,340	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

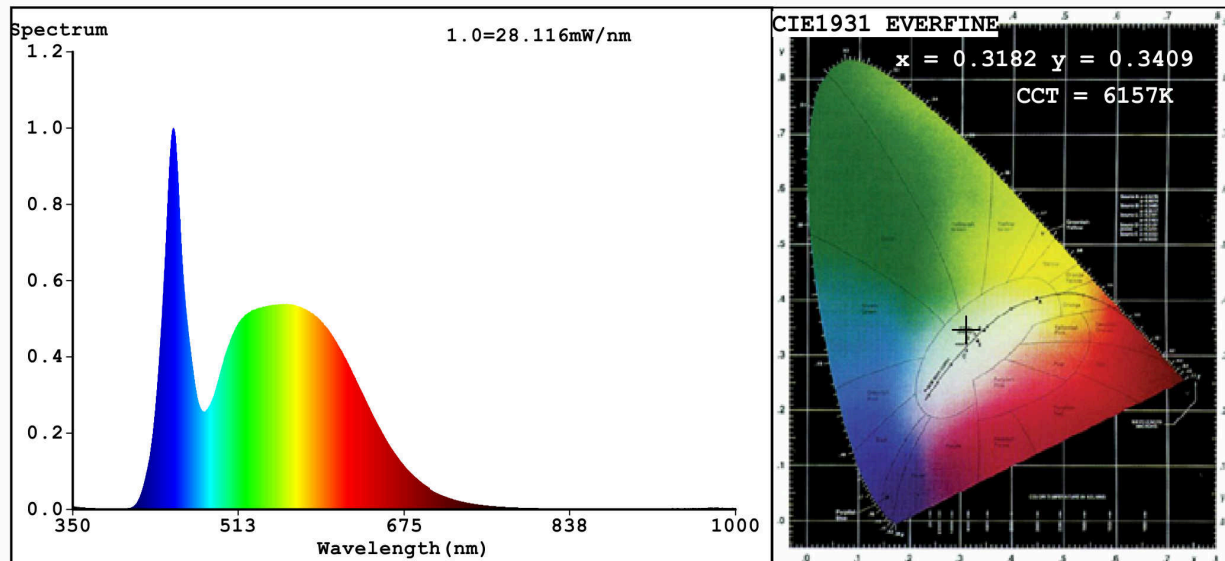

Color Parameters:

Chromaticity Coordinate: $x=0.3182$ $y=0.3409$ $u'=0.1972$ $v'=0.4753$
 CCT=6157K (Duv=0.0065) Dominant WL: $\lambda_d = 498.2\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=4.7%
 Ratio: R=13.5% G=81.3% B=5.2% ; Peak WL: $\lambda_p = 448.6\text{nm}$ FWHM=24.2nm
 Render Index: $R_a = 82.3$

R1 =80	R2 =86	R3 =91	R4 =83	R5 =81	R6 =82	R7 =88
R8 =69	R9 =3	R10=67	R11=83	R12=62	R13=81	R14=95
						R15=74

Photo Parameters:

Flux = 989.4 lm Eff. : 93.71 lm/W $\Phi_e = 3.161\text{ W}$

Electrical parameters:

V = 219.97 V I = 0.08773 A P = 10.56 W PF = 0.5471

WHITE: ANSI_6500K

Status: Integral T = 31 ms $I_p = 36589$ (56%)

Model: LED PEAR A60
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99XLED821
 Date: 2021-01-27 09:43:15
 Humidity: 65.0%
 Remarks: 7084