

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 9BR55LEDE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	55	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	55,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,382 0,376	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 994	Beam angle in degrees, or the range of beam angles that can be set	126	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,90	
the lumen maintenance factor	1,00			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	54	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	1,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

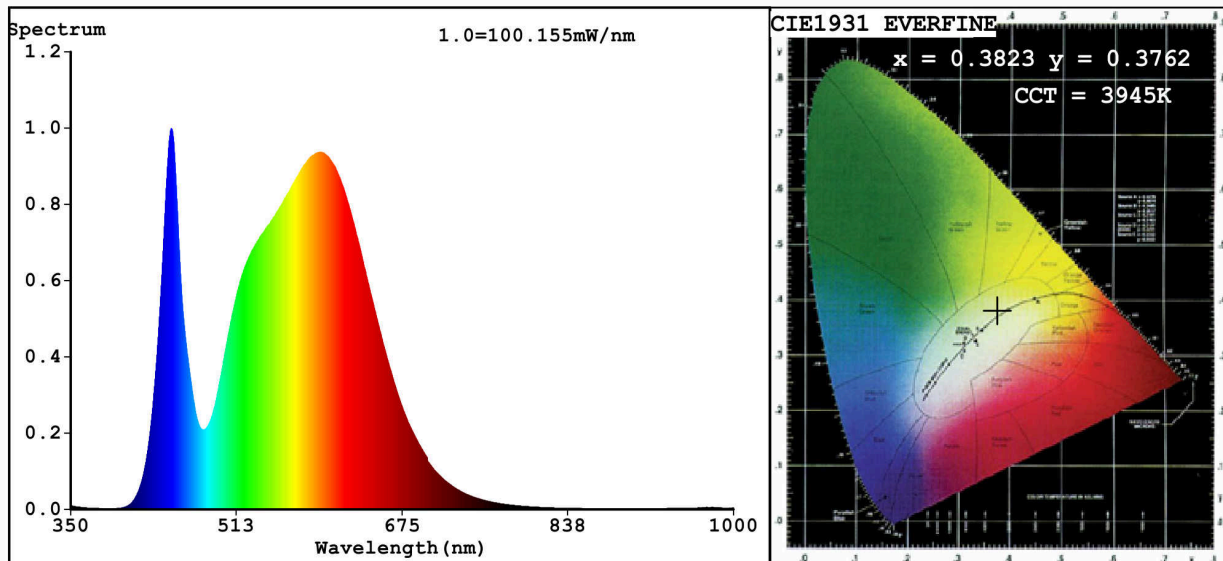

Color Parameters:

Chromaticity Coordinate: $x=0.3823$ $y=0.3762$ $u'=0.2266$ $v'=0.5016$
CCT=3945K (Duv=-0.0008) Dominant WL:Ld =579.7nm WL:Lc = --nm Purity=27.6%
Ratio:R=18.4% G=78.5% B=3.1%; Peak WL:Lp=448.6nm FWHM=23.8nm
Render Index:Ra=81.6

R1 =81	R2 =86	R3 =91	R4 =82	R5 =80	R6 =81	R7 =86
R8 =66	R9 =10	R10=68	R11=81	R12=61	R13=82	R14=95 R15=75

Photo Parameters:

Flux = 5447 lm Eff. : 99.03 lm/W Fe = 16.71 W

Electrical parameters:

V = 219.92 V I = 0.2613 A P = 55.01 W PF = 0.9573
WHITE:ANSI_4000K

Status: Integral T = 12 ms Ip = 55354 (84%)

Model:BELLA LUMINAIRE
Tester:Atanas DAKOV
Temperature:25.3Deg
Manufacturer:ELMARK

Number:9BR55LED
Date:2021-02-10 16:06:16
Humidity:65.0%
Remarks:7388