

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 9MOD18W

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	20,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,368 0,361	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	442	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	21	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

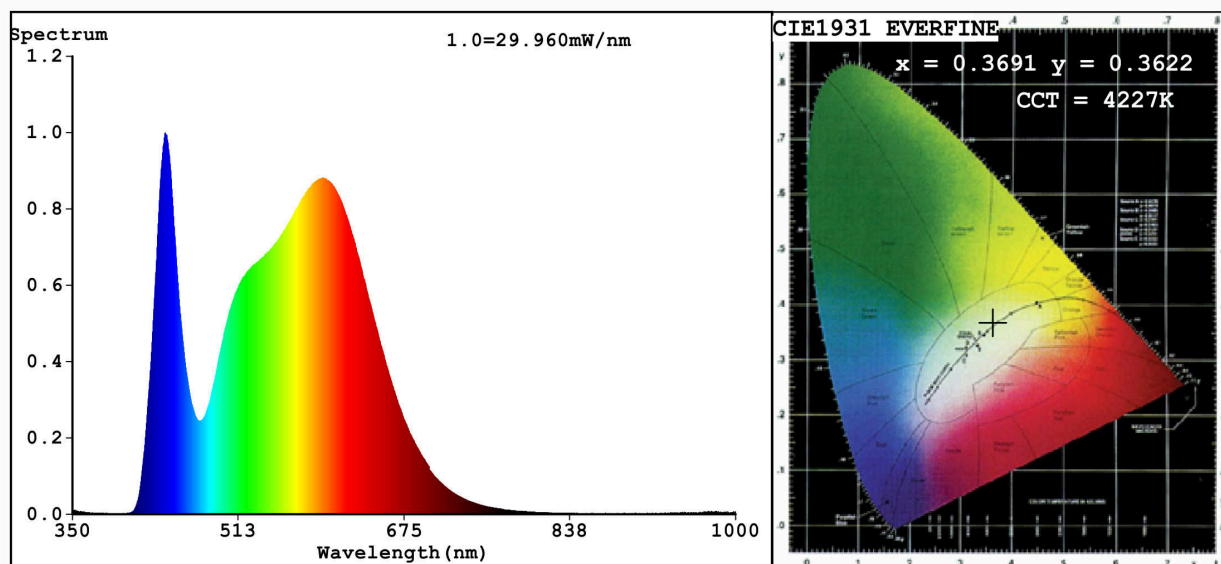

### Color Parameters:

Chromaticity Coordinate:  $x=0.3691$   $y=0.3622$   $u'=0.2234$   $v'=0.4933$

CCT=4227K (Duv=-0.0035) Dominant WL:  $\lambda_d = 580.7\text{nm}$  Purity=19.4%

Ratio: R=18.2% G=78.1% B=3.7% ; Peak WL:  $\lambda_p = 440.8\text{nm}$  FWHM=27.7nm

Render Index:  $R_a = 84.7$

R1 =84	R2 =88	R3 =92	R4 =86	R5 =85	R6 =85	R7 =86
R8 =70	R9 =20	R10=73	R11=87	R12=75	R13=85	R14=95 R15=79

### Photo Parameters:

Flux = 1553 lm Eff. : 75.57 lm/W  $P_e = 4.951\text{ W}$

### Electrical parameters:

V = 230.00 V I = 0.1598 A P = 20.56 W PF = 0.5594

WHITE: ANSI\_4000K

Status: Integral T = 30 ms  $I_p = 50473$  (77%)

Model: MOD FIXTURE/18W  
Tester: Petya Marinova  
Temperature: 25.3Deg  
Manufacturer: ELMARK

Number: 9MOD18W  
Date: 2018-08-27 12:39  
Humidity: 65.0%  
Remarks: 018V008A\_4729