

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92DL81F1530/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 050 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	15,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	138	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	138	
	Depth	98	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,422 0,399
Parameters for directional light sources:			
Peak luminous intensity (cd)	598	Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

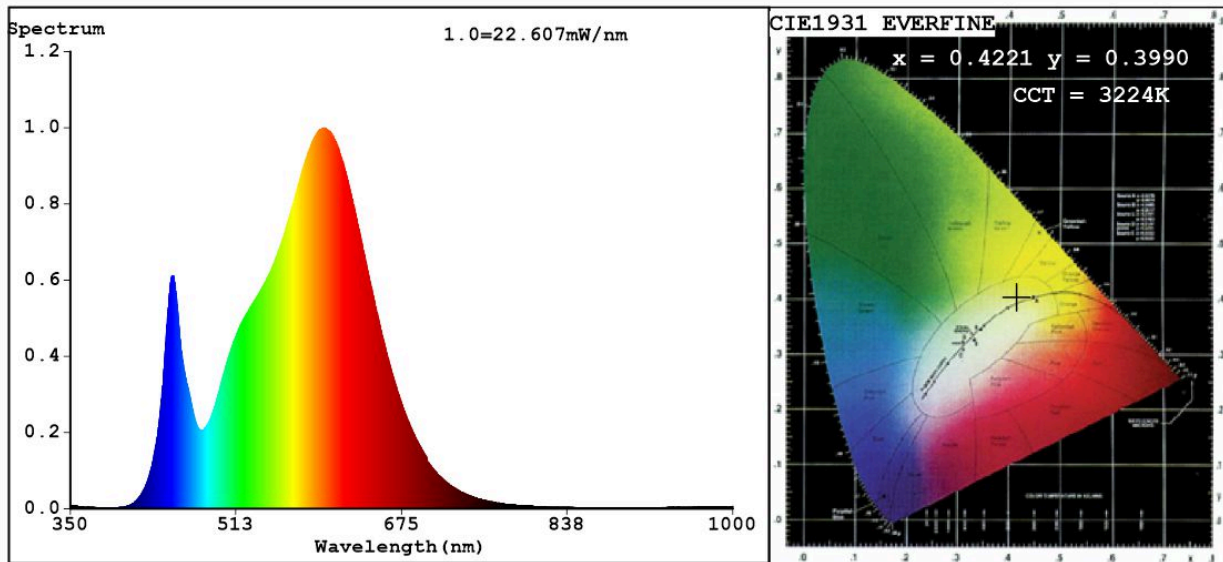

Color Parameters:

Chromaticity Coordinate: $x=0.4221$ $y=0.3990$ $u'=0.2432$ $v'=0.5171$
 CCT=3224K (Duv=0.0002) Dominant WL:Ld =581.8nm WL:Lc = --nm Purity=46.4%
 Ratio:R=21.3% G=76.0% B=2.8%; Peak WL:Lp=598.8nm FWHM=131.6nm
 Render Index:Ra=81.1

R1 =79 R2 =89 R3 =96 R4 =79 R5 =79 R6 =87 R7 =82
 R8 =57 R9 =0 R10=76 R11=78 R12=68 R13=81 R14=98 R15=71

Photo Parameters:

Flux = 1142 lm Eff. : 74.89 lm/W Fe = 3.418 W

Electrical parameters:

V = 229.81 V I = 0.1148 A P = 15.25 W PF = 0.5777
 WHITE:ANSI_3500K

Status: Integral T = 48 ms Ip = 53969 (82%)

Model:LED DOWNLIGHT FIXTURES
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:92DL81F1530 BL
 Date:2023-01-11 14:42:10
 Humidity:65.0%
 Remarks:8840