

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92DL84TS0530/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	5,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,439 0,410	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	600	Beam angle in degrees, or the range of beam angles that can be set	24	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

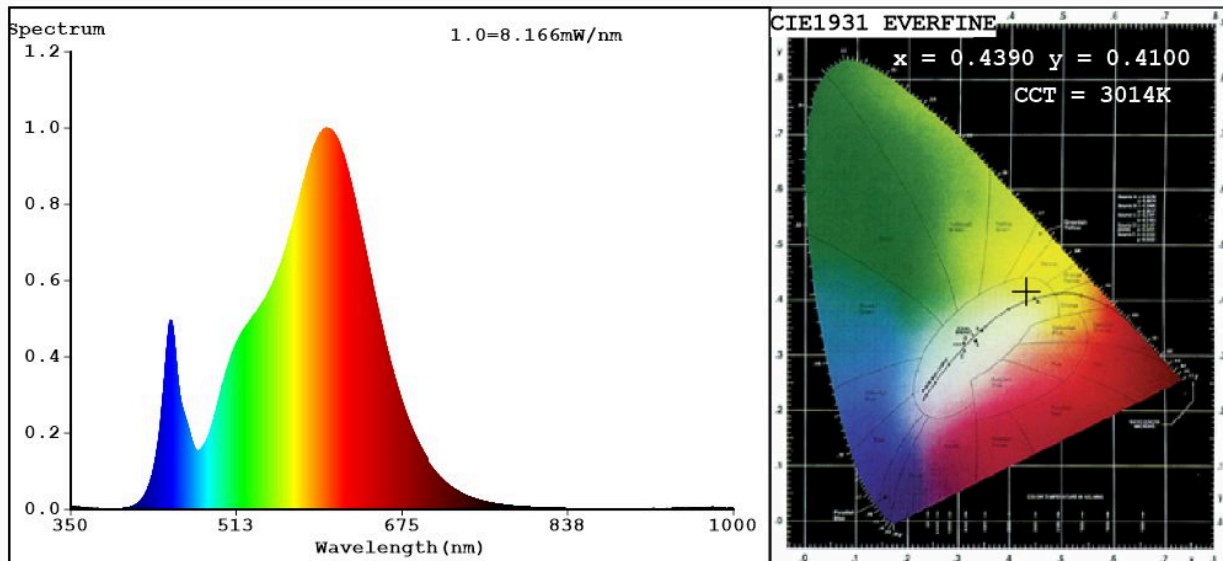

### Color Parameters:

Chromaticity Coordinate:  $x=0.4390$   $y=0.4100$  /  $u'=0.2493$   $v'=0.5240$   
 CCT=3014K (Duv=0.0021) Dominant WL:  $L_d = 582.1nm$  WL:  $L_c = --nm$  Purity=54.8%  
 Ratio: R=22.5% G=75.1% B=2.4% ; Peak WL:  $L_p = 600.5nm$  FWHM=126.1nm  
 Render Index:  $R_a = 81.4$

R1 =79	R2 =89	R3 =97	R4 =80	R5 =80	R6 =88	R7 =83
R8 =56	R9 =0	R10=76	R11=80	R12=71	R13=81	R14=99 R15=70

### Photo Parameters:

Flux = 397.6 lm Eff. : 69.97 lm/W Fe = 1.180 W

### Electrical parameters:

V = 229.79 V I = 0.04607 A P = 5.683 W PF = 0.5369

WHITE:ANSI\_3000K

Status: Integral T = 91 ms Ip = 37190 (57%)

Model:LED DOWNLIGHT FIXTURES  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:92DL84TS0530 WH  
 Date:2023-01-09 13:42:35  
 Humidity:65.0%  
 Remarks:8840