

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92DLTS2430/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 700 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	160	
	Depth	160	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,430 0,400
Parameters for directional light sources:			
Peak luminous intensity (cd)	600	Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

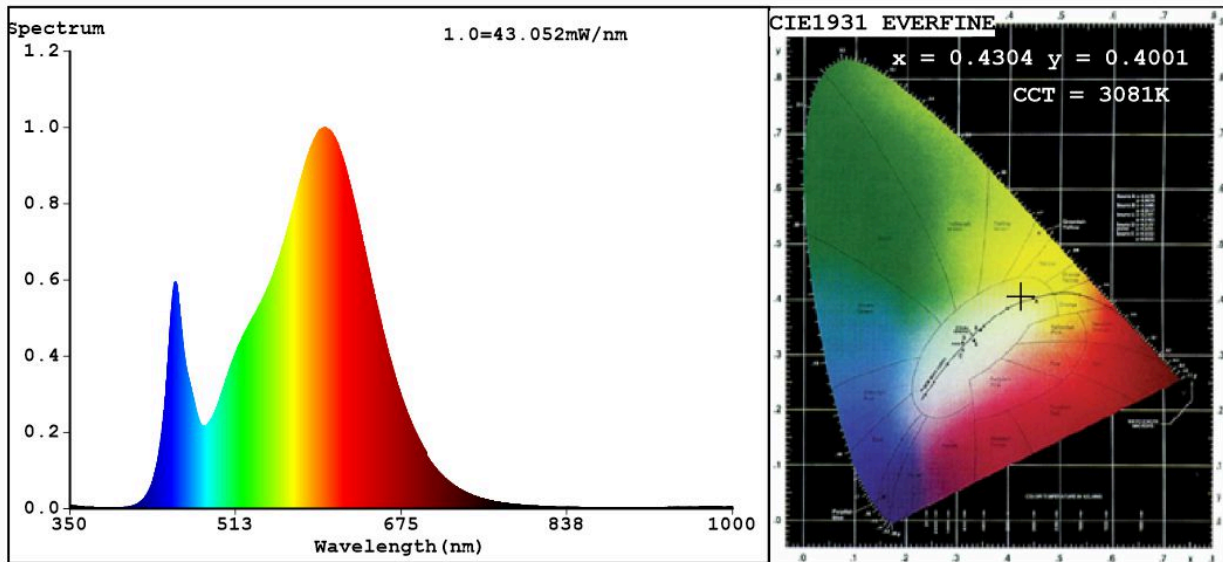

Color Parameters:

Chromaticity Coordinate: $x=0.4304$ $y=0.4001$ / $u'=0.2480$ $v'=0.5189$
 CCT=3081K (Duv=-0.0007) Dominant WL:Ld =582.7nm WL:Lc = --nm Purity=49.3%
 Ratio:R=22.1% G=75.1% B=2.8%; Peak WL:Lp=600.5nm FWHM=125.0nm
 Render Index:Ra=80.8

R1 =79 R2 =91 R3 =95 R4 =77 R5 =79 R6 =88 R7 =81
 R8 =56 R9 =0 R10=79 R11=76 R12=68 R13=82 R14=98 R15=72

Photo Parameters:

Flux = 2120 lm Eff. : 88.04 lm/W Fe = 6.414 W

Electrical parameters:

V = 229.77 V I = 0.1791 A P = 24.08 W PF = 0.5852
 WHITE:ANSI_3000K

Status: Integral T = 24 ms Ip = 51569 (79%)

Model:LED DOWNLIGHT FIXTURES
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:92DLTS2430 WH
 Date:2023-01-10 16:38:01
 Humidity:65.0%
 Remarks:8840