

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** STELLAR

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 95ELLISLED18/W

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 700 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	18,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,382 0,378	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	446	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	8	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,30	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

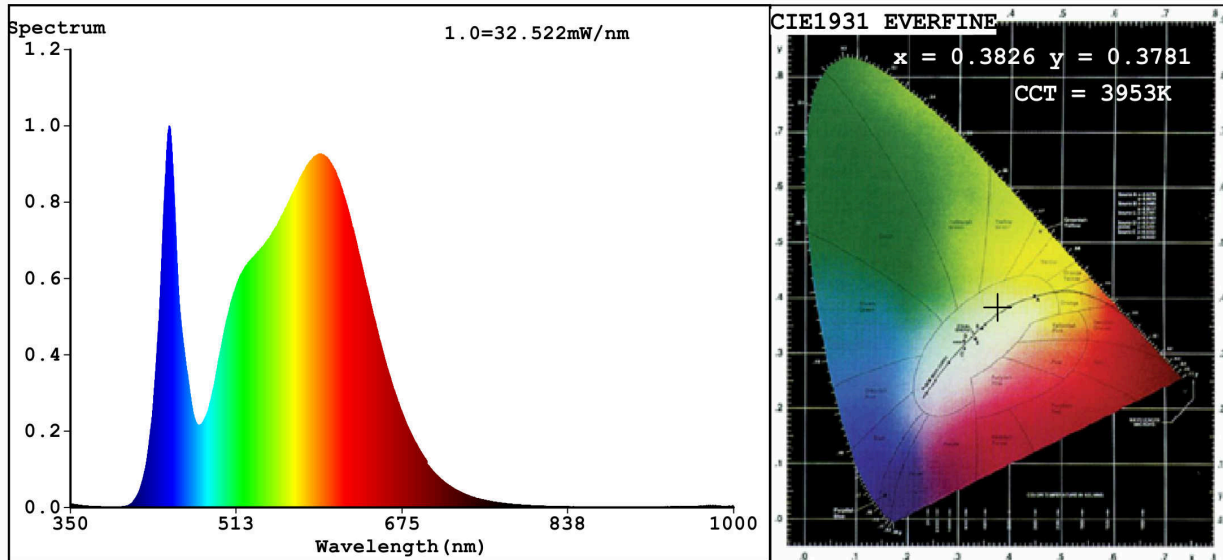

### Color Parameters:

Chromaticity Coordinate:  $x=0.3826$   $y=0.3781$   $u'=0.2260$   $v'=0.5025$   
 CCT=3953K (Duv=0.0000) Dominant WL:  $L_d = 579.2nm$  WL:  $L_c = --nm$  Purity=28.3%  
 Ratio: R=18.4% G=78.3% B=3.3% Peak WL:  $L_p = 446.9nm$  FWHM=21.2nm  
 Render Index:  $R_a = 82.7$  AvgR=76.3 TM30:  $R_f = 84$   $R_g = 97$   $L_{av} = 570.1nm$

R1 =81	R2 =88	R3 =93	R4 =83	R5 =82	R6 =84	R7 =86
R8 =65	R9 =8	R10=72	R11=83	R12=66	R13=82	R14=96
						R15=75

### Photo Parameters:

Flux = 1726 lm Eff. : 91.41 lm/W Fe = 5.265 W

### Electrical parameters:

V = 225.02 V I = 0.2434 A P = 18.88 W PF = 0.3447

WHITE: ANSI\_4000K

Status: Integral T = 36 ms Ip = 50467 (77%)

Model: LED CEILING LAMP  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 95ELLISLED18 W  
 Date: 2021-09-03 11:18:09  
 Humidity: 65.0%  
 Remarks: 7644