

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** STELLAR

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 95ELLISLED24/W

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 500 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	26,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,380 0,377	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	446	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,40	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

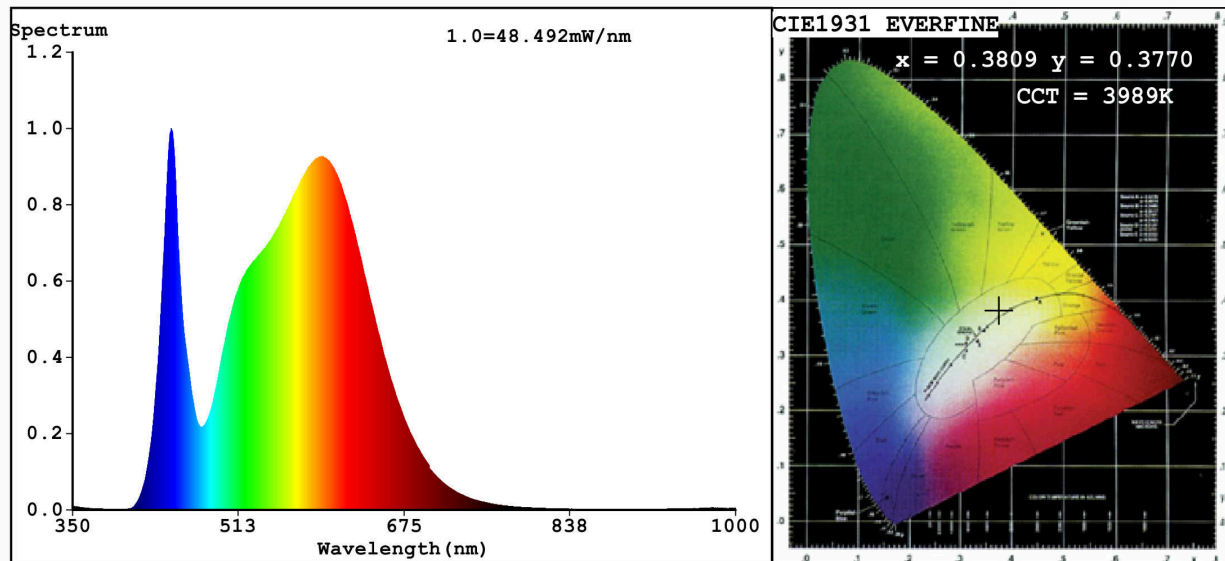

### Color Parameters:

Chromaticity Coordinate:  $x=0.3809$   $y=0.3770$   $u'=0.2253$   $v'=0.5018$   
CCT=3989K (Duv=-0.0000) Dominant WL:Ld =579.1nm WL:Lc = --nm Purity=27.5%  
Ratio:R=18.2% G=78.4% B=3.3%; Peak WL:Lp=446.6nm FWHM=22.0nm  
Render Index:Ra=82.2 AvgR=75.6 TM30:Rf=83 Rg=97 Lav=569.2nm

R1 =80 R2 =87 R3 =93 R4 =83 R5 =81 R6 =83 R7 =86  
R8 =64 R9 =5 R10=71 R11=82 R12=66 R13=82 R14=96 R15=74

### Photo Parameters:

Flux = 2576 lm Eff. : 97.63 lm/W Fe = 7.839 W

### Electrical parameters:

V = 225.19 V I = 0.2883 A P = 26.39 W PF = 0.4064

WHITE:ANSI\_4000K

Status: Integral T = 20 ms Ip = 44152 (67%)

Model:LED CEILING LAMP  
Tester:Atanas DAKOV  
Temperature:25.3Deg  
Manufacturer:ELMARK

Number:95ELLISLEDR24 W  
Date:2021-09-02 14:35:45  
Humidity:65.0%  
Remarks:7644