

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 96GRF2/130220

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	90 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	1,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	42	
	Depth	42	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,379 0,380
Parameters for directional light sources:			
Peak luminous intensity (cd)	376	Beam angle in degrees, or the range of beam angles that can be set	15
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ 1)	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	9
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

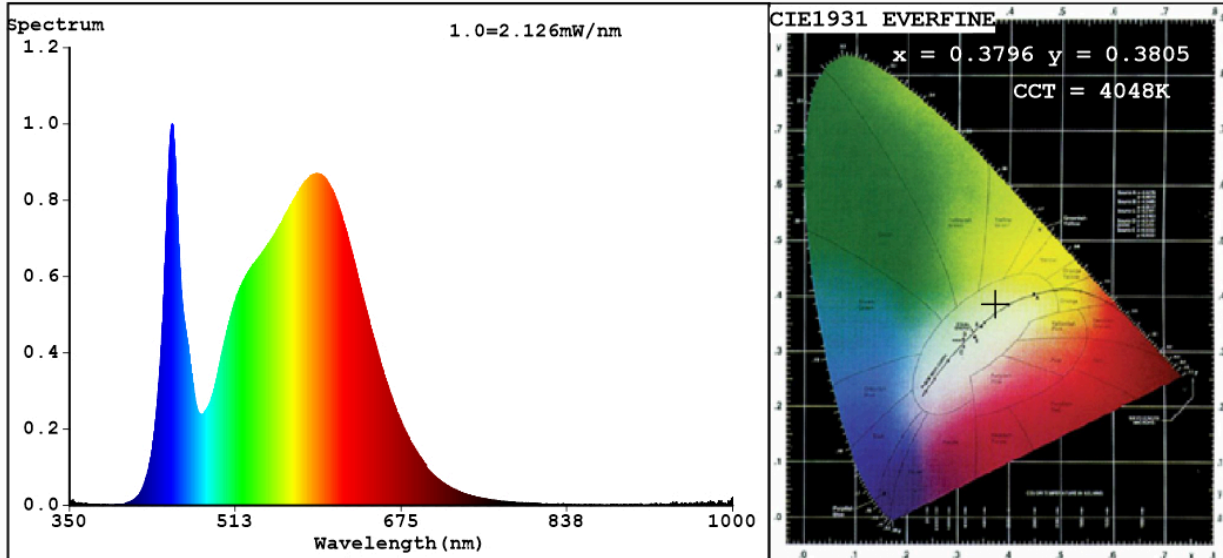

Color Parameters:

Chromaticity Coordinate: $x=0.3796$ $y=0.3805$ / $u'=0.2231$ $v'=0.5031$
 CCT=4048K (Duv=0.0020) Dominant WL:Ld =577.8nm WL:Lc = --nm Purity=28.1%
 Ratio:R=17.8% G=78.7% B=3.5% ; Peak WL:Lp=450.6nm FWHM=20.2nm
 Render Index:Ra=81.4

R1 =79 R2 =88 R3 =94 R4 =80 R5 =79 R6 =83 R7 =86
 R8 =62 R9 =1 R10=71 R11=79 R12=59 R13=81 R14=97 R15=73

Photo Parameters:

Flux = 106.8 lm Eff. : 70.06 lm/W Fe = 320.0 mW

Electrical parameters:

V = 229.57 V I = 0.01693 A P = 1.524 W PF = 0.3922
 WHITE:ANSI_4000K

Status: Integral T = 376 ms Ip = 34463 (53%)

Model:LED OUTDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:96GRF2 1302320
 Date:2022-09-02 09:55:32
 Humidity:65.0%
 Remarks:8841