

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 96GRFLED52/GR

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	100 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	1,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,376 0,374	
Parameters for directional light sources:				
Peak luminous intensity (cd)	457	Beam angle in degrees, or the range of beam angles that can be set	30	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	14	Survival factor	0,00	
the lumen maintenance factor	0,00			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,30	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

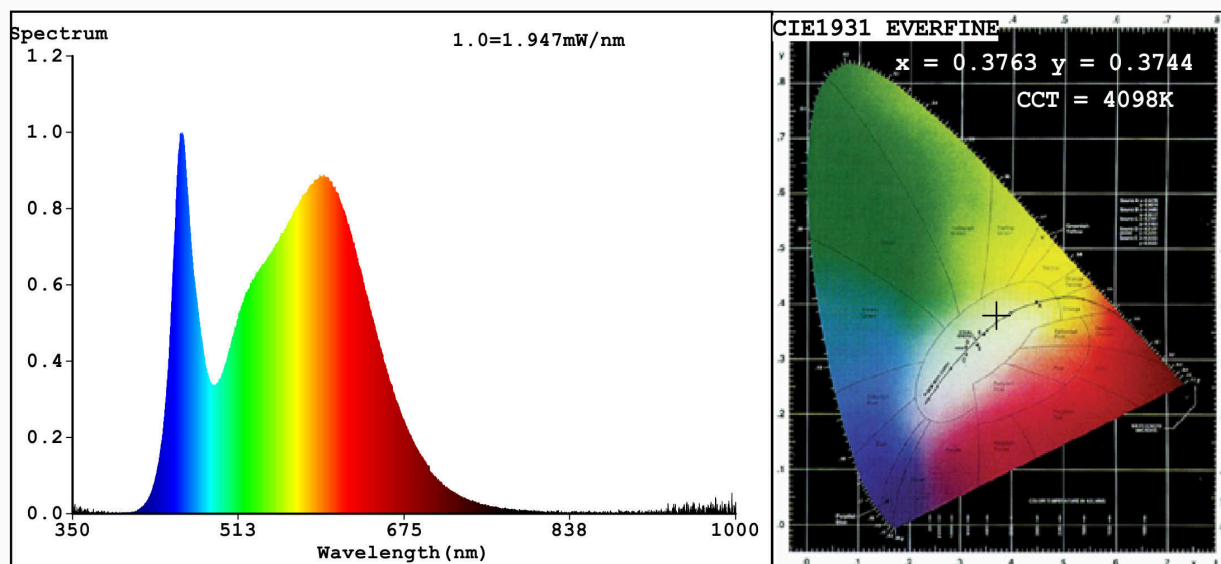

Color Parameters:

Chromaticity Coordinate: $x=0.3763$ $y=0.3744$ $u'=0.2233$ $v'=0.4999$

CCT=4098K(Duv=0.0001) Dominant WL:Ld =578.6nm Purity=25.3%

Ratio:R=18.2% G=77.5% B=4.3%; Peak WL:Lp=457.4nm FWHM=28.4nm

Render Index:Ra=84.0

R1 =83	R2 =93	R3 =96	R4 =80	R5 =82	R6 =89	R7 =85
R8 =65	R9 =14	R10=82	R11=78	R12=61	R13=86	R14=98
						R15=78

Photo Parameters:

Flux = 99.19 lm Eff. : 62.22 lm/W Fe = 307.0 mW

Electrical parameters:

V = 230.02 V I = 0.01993 A P = 1.594 W PF = 0.3478

WHITE:ANSI_4000K

Status: Integral T = 291 ms Ip = 33183 (51%)

Model:GRF LED WALL FIXTURES/1.5W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:96GRFLED52_DGR,GR
Date:2019-01-31 12:59
Humidity:65.0%
Remarks:FLD180508_5222