

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED100G

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	3,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	86
Outer dimensions without	Height	265	Spectral power distribution in the See image in last page
	Width	220	
	Depth	220	

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	25	
		Chromaticity coordinates (x and y)	0,522 0,419	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	16	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	20	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a): not applicable;

(b): not applicable;

Spectrum Test Report

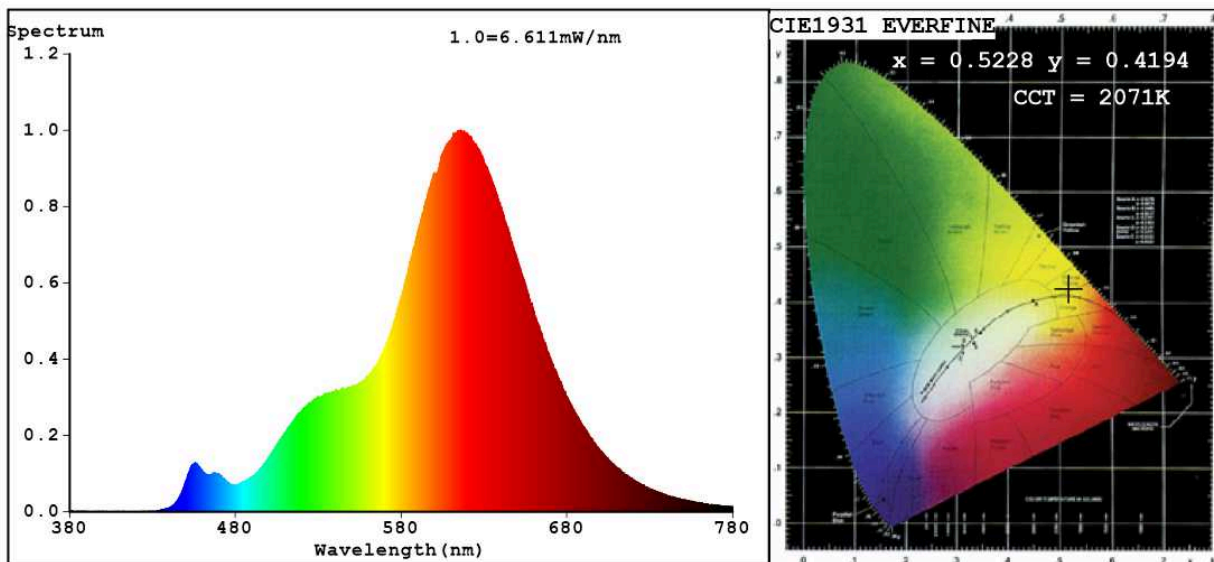

Color Parameters:

Chromaticity Coordinate: $x=0.5228$ $y=0.4194$ / $u'=0.2993$ $v'=0.5402$

CCT=2071K (Duv=0.0016) Dominant WL: $\lambda_d = 587.8$ nm Purity=82.8%

Ratio: R=33.5% G=65.2% B=1.3%; Peak WL: $\lambda_p = 616.1$ nm FWHM=86.0 nm

Render Index: Ra=86.1

R1 =88 R2 =97 R3 =93 R4 =89 R5 =89 R6 =95 R7 =80
R8 =58 R9 =16 R10=93 R11=95 R12=90 R13=91 R14=97 R15=75

Photo Parameters:

Flux = 226.2 lm Eff. : 57.37 lm/W $P_e = 748.8$ mW

Electrical parameters:

V = 230.00 V I = 0.01942 A P = 3.942 W PF = 0.8825

WHITE:OUT

Status: Integral T = 134 ms $I_p = 54460$ (83%)

Model: VINTAGE LAMP/4W
Tester: Petya Marinova
Temperature: 25.3 Deg
Manufacturer: ELMARK

Number: 99LED100G
Date: 2019-03-21 10:48
Humidity: 65.0%
Remarks: SH18BG-JC_ELM03_5480