

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** STELLAR

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99XLED620E

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value	
<b>General product parameters:</b>				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F	
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 977 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000	
On-mode power ( $P_{on}$ ), expressed in W	18,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00	
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	79	
Outer dimensions without	Height	Spectral power distribution in the	See image in last page	
	Width			295
	Depth			18

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,392 0,390
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	592		Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0		Survival factor	0,00
the lumen maintenance factor	0,95			

(a): not applicable;

(b): not applicable;

**Spectrum Test Report**

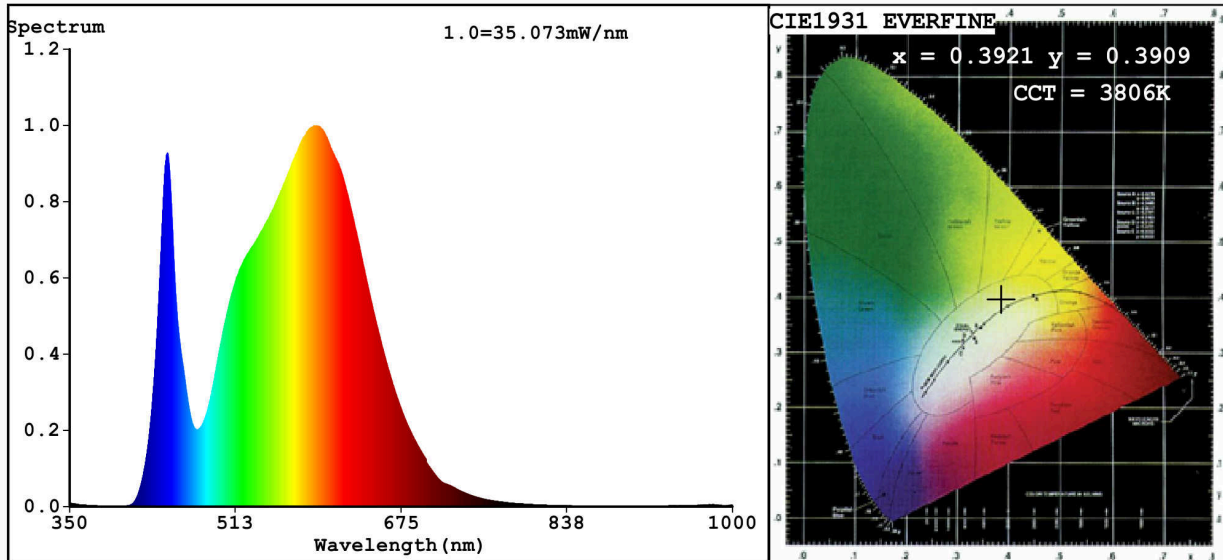

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3921$   $y=0.3909$  /  $u'=0.2271$   $v'=0.5094$   
 CCT=3806K (Duv=0.0032) Dominant WL:  $L_d = 578.3\text{nm}$  WL:  $L_c = \text{--nm}$  Purity=35.0%  
 Ratio: R=18.2% G=78.8% B=3.0% ; Peak WL:  $L_p = 592.2\text{nm}$  FWHM=145.8nm  
 Render Index:  $R_a = 79.8$

R1 =77    R2 =85    R3 =93    R4 =80    R5 =78    R6 =81    R7 =85  
 R8 =60    R9 =0    R10=66    R11=79    R12=62    R13=78    R14=96    R15=70

**Photo Parameters:**

Flux = 1977 lm    Eff. : 82.71 lm/W     $P_e = 5.851$  W

**Electrical parameters:**

$V = 219.97$  V     $I = 0.2142$  A     $P = 23.91$  W PF = 0.5073  
 WHITE:ANSI\_4000K

Status: Integral T = 28 ms  $I_p = 48537$  (74%)

Model: LED PANEL ROUND OM	Number: 99XLED620
Tester: Atanas DAKOV	Date: 2021-02-11 11:30:00
Temperature: 25.3Deg	Humidity: 65.0%
Manufacturer: ELMARK	Remarks: 7388